


# Connecto® I Shallow channel – Outside width 130 mm – dark grey

Code: CAB133A



EN1433


**Top view**

**Side view**

**FUNCTION:**

The drainage channel is designed to drain run-off water. In accordance with EN1433 standard and the marking, it can be used in private areas for all building applications, the environment of home, pedestrian areas, private car parks or car parking decks in class A15 or B125.

**DESCRIPTION:**

This channel body is injected in light grey polypropylene with male/female interlocking system. Most of Nicoll gratings 128 mm wide (PVC, PP, Polyamide, galvanized steel or stainless steel) are suitable with this channel.

**ACCESSORIES:**

The network connection can be realized thanks to the following PVC accessories:


- end cap/end or lateral outlet Ø 40/50: NAHJ13A
- vertical outlet Ø 100 or 110: STCAB13 or SVCAB13
- junction: JCAB13
- locking system with galvanized screw: FIXCAB13

**CHARACTERISTICS:**

Effective width: 110 mm  
Effective depth: 32 mm  
Hydraulic section: 35 cm<sup>2</sup>  
Weight: 3,4 kg


 STCAB13  
SVCAB13


NAHJ13A



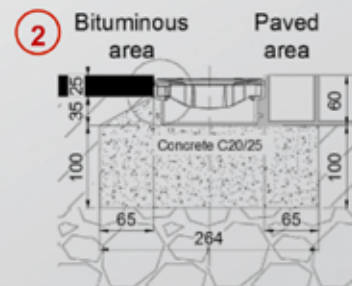
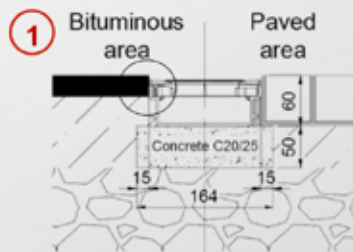

JCAB13



FIXCAB13

**IMPLEMENTATION:**

1. See the scheme opposite for class A15
2. See the scheme opposite for class B125


**QUALITY - ENVIRONMENT:**

ISO 9001  
ISO 14001  
ISO 50001  
BUREAU VERITAS  
Certification



DATE: August 2015