
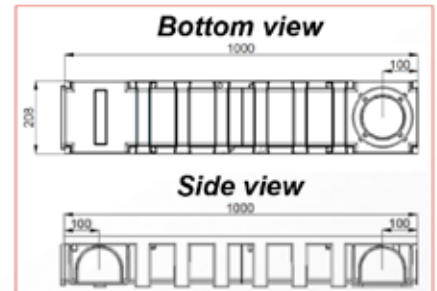
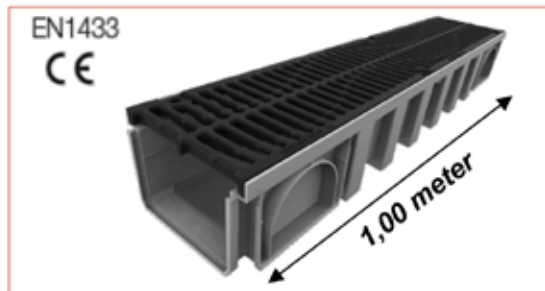


Connecto® I Channel - Outside width 200 mm - with cast iron gratings class B125

Code: CAN15BF

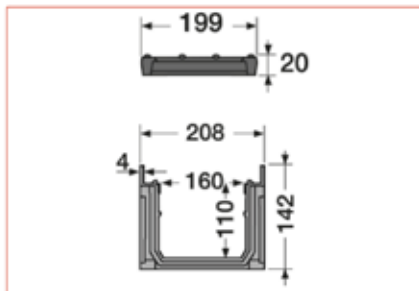

FUNCTION:

The drainage channel is designed to drain run-off water. In accordance with EN1433 standard and the CE marking, it can be used in footways, pedestrian areas, private car parks or car parking decks in class B125.

DESCRIPTION:

It consists of:

- an injected polypropylene body in light grey colour with male/female interlocking system
- two cast iron gratings class B125

ACCESSORIES:

To fix a grating, it's necessary to use two FIXCAN2N (set made up of 1 screw covered with black zinc nickel and 1 insert of zamak bichromate).


The network connection can be realized thanks to the following PVC accessories:

- end cap/end or lateral outlet \varnothing 100, 110 or 125: NAT188, NAV188 or NAX188
- vertical outlet \varnothing 100, 110 or 125: STCAN, SVCAN or SXCAN
- sump unit with outlet \varnothing 100 or 110: PSCVT or PSCVV



CHARACTERISTICS:

- Resistance class: B125
- Effective width: 160 mm
- Effective depth: 110 mm
- Grating type: Cast iron
- Drainage surface: 870 cm²/ml
- Hydraulic section: 176 cm²
- Opening dimensions: 14 / 169 mm
- Weight: 11.4 kg

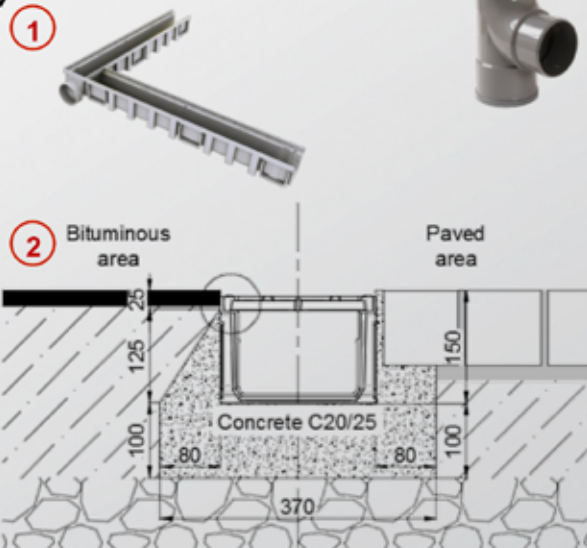

IMPLEMENTATION:

1. The channel body makes it possible to carry out 90° angles by interlocking.
2. See the scheme opposite

QUALITY - ENVIRONMENT:



DATE: July 2015