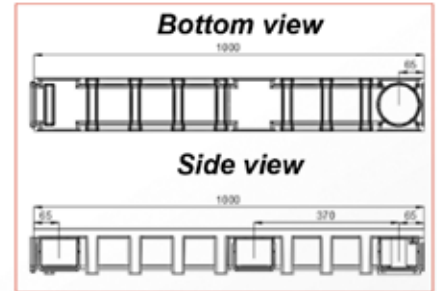
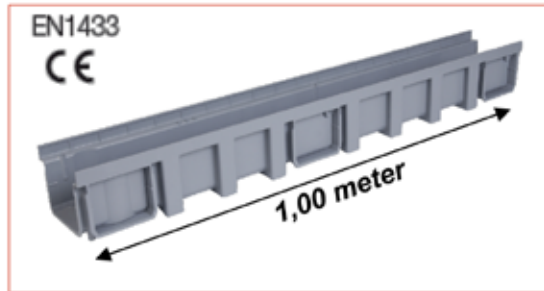
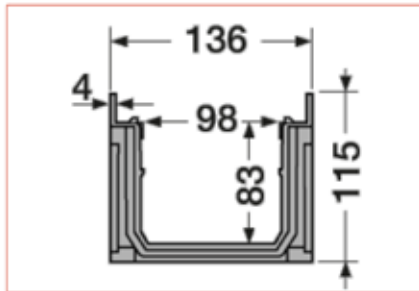


Connecto® I High channel – Outside width 130 mm - light grey

Code: CAN177


FUNCTION:

The drainage channel is designed to drain run-off water. In accordance with EN1433 standard and the CE marking, it can be used in private areas for all building applications, the environment of home, pedestrian areas, private car parks or car parking decks in class A15 or B125.

DESCRIPTION:

This channel body is injected in light grey polypropylene with male/female interlocking system. The gratings GRL77 (light grey), GRL77S (sand), GRL77K (dark grey), GR77P (light grey), GR77PS (sand), GR77PB (white), GR77 (light grey) et GR77S (sand) are suitable with this channel.

ACCESSORIES:

The network connection can be realized thanks to the following PVC accessories:

- end cap/end or lateral outlet Ø 100, 110 or 125: NAT177 or NAV177
- vertical outlet Ø 100 or 110: STCAN or SVCAN
- sump unit with outlet Ø 100 or 110: PSCVT or PSCVV

CHARACTERISTICS:

Effective width: 98 mm
 Effective depth: 83 mm
 Hydraulic section: 81 cm²
 Weight: 1,3 kg


 STCAN
SVCAN

 NAT177
NAV177

 PSCVT
PSCVV


IMPLEMENTATION:

1. The channel body makes it possible to carry out 90° angles by interlocking.
2. See the scheme opposite for class A15
3. See the scheme opposite for class B125


①



②

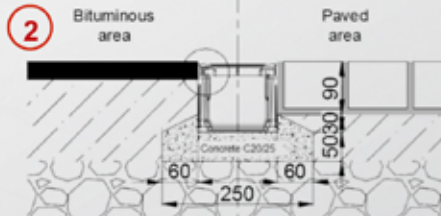

③

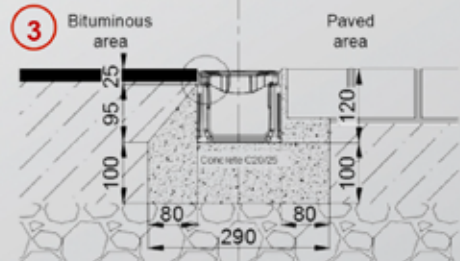
QUALITY - ENVIRONMENT:

 ISO 9001
 ISO 14001
 ISO 50001
 BUREAU VERITAS
 Certification


DATE: August 2015