





Kenadrain I Channel 100mm wide with ductile iron gratings class C250 – Height 2

Code: DR102CF

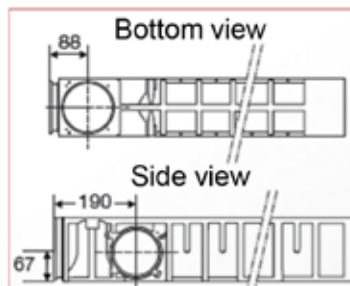

EN1433

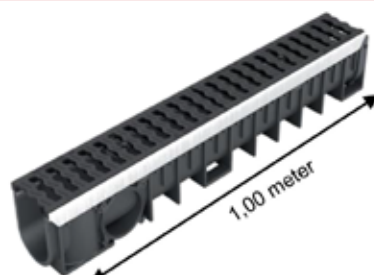

■ FUNCTION:

The drainage channel is designed to drain run-off water. In accordance with EN1433 standard and the marking, it can be used in public area in class C250.

■ DESCRIPTION:

It consists of:

- an injected recycled polypropylene black body
- two galvanized steel edges
- two ductile iron gratings class C250
- 1 screw per grating on galvanized locking bar



STDR10
SVDR10
SXDR10



NTDR102
NVDR102



PS100V
PS100X

■ ACCESSORIES:

To connect the channels to the underground network:

- end cap/end outlet Ø100 or 110 – NTDR102 or NVDR102
- lateral or vertical outlet Ø100, 110 or 125 – STDR10, SVDR10 or SXDR10
- sump unit with outlet Ø110 or 125 – PS100V or PS100X


■ CHARACTERISTICS:

Resistance class: C250
Effective width: 98 mm
Effective depth: 132 mm
Grating type: Ductile iron
Drainage surface: 392 cm²/ml
Hydraulic section: 122 cm²
Opening dimensions: 18 / 96 mm
Weight: 12.0 Kg



■ IMPLEMENTATION:

X = 150 mm; L = 440 mm
Z = 150 mm; Y = 90 mm; y = 85 mm

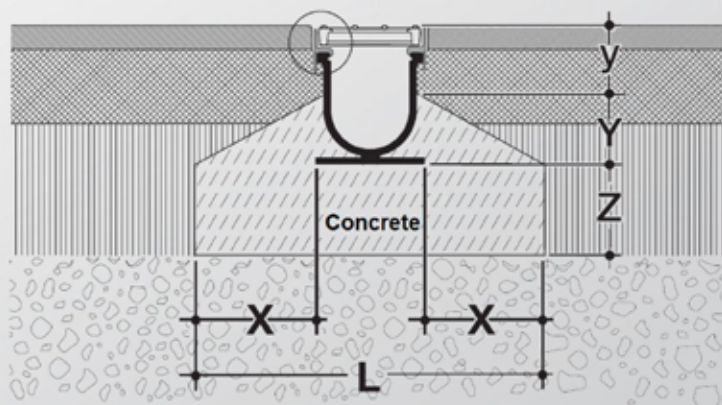

■ QUALITY - ENVIRONMENT:

ISO 9001
ISO 14001
ISO 50001
BUREAU VERITAS
Certification



DATE: September 2014