
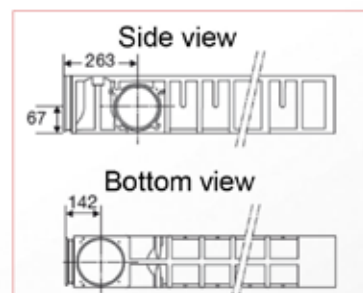
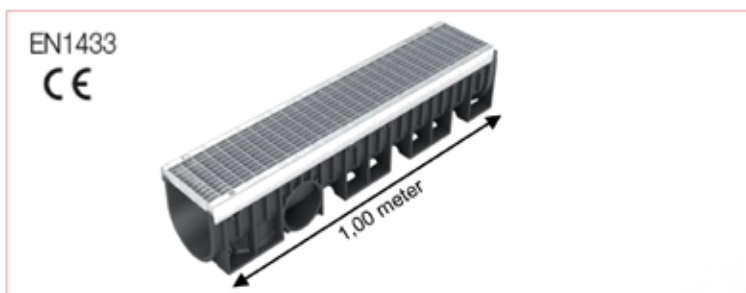



Kenadrain I Channel width 150 with galvanized steel mech grating class B125

Code: DR152BC



FUNCTION:

The drainage channel is designed to evacuation run-off water. In accordance with the EN1433 standard and the CE marking, it can be used in footways, pedestrian areas and comparable zones, private car parks or car parking decks in class **B125**.

DESCRIPTION:

It is comprised of:

- a injected recycled polypropylene black body
- two galvanized steel edges.
- one galvanized steel mech grating class B125
- four locking systems with bolt

ACCESSORIES:

The connection to the sewage can be achieved through the following PVC fittings:

- End cap & inlet-outlet cap Ø125 – NXDR152
- Lateral outlet Ø125 – SXDR10
- Vertical outlet Ø160 – SZDR20
- Sump units EKSO Ø160 – PS150Z



SXDR10

SZDR20



NXDR152



PS150Z


CARACTERISTICS:

- Resistance class: B125
- Effective width: 163 mm
- Effective depth: 165 mm
- Grating type: galvanized steel mech
- Drainage surface: 1230 cm²/ml
- Hydraulic section: 240.8 cm²
- Opening dimensions: 33 x 15 mm
- Weight: 14.2 Kg



IMPLEMENTATION:

- X = 100 mm; L = 410 mm
- Z = 100 mm; Y = 50 mm; y = 160 mm

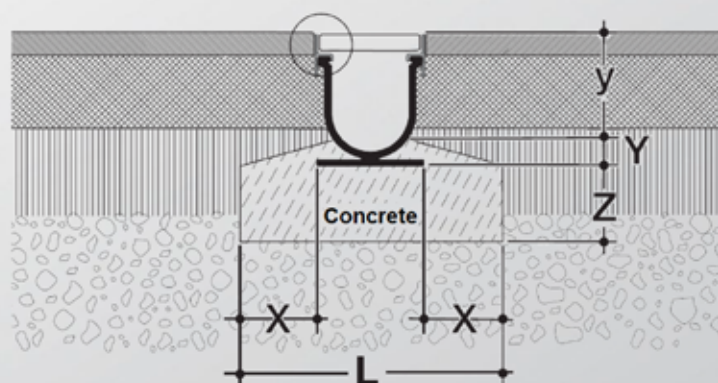

QUALITY - ENVIRONMENT:

ISO 9001
ISO 14001
ISO 50001
BUREAU VERITAS
Certification



DATE: May 2014