
Wicoll DATA SHEET


Kenadrain I Channel width 200, class C250

Code: DR202CF









■ FUNCTION:

This product is to drain run-off water with gratings of length 1000 mm, of class C250 complying with the standard NF-EN 1433, holding the CE marking, assembled via a male/female connection system with locking

■ DESCRIPTION:

It is comprised of:

- a injected recycled polypropylene black body
- two galvanized steel edges.
- two black cast iron gratings class C250
- 4 locking system with bolts per grating







ACCESSORIES:

To connect the channels to the underground network:

- PVC end caps and verticals outlets (Ø160 or Ø200)
- EKSO sump units manufactured also in PVC

■ CHARACTERISTICS:

Resistance class: C250 Effective width: 202 mm Effective depth: 200 mm Grating type: Cast iron

Drainage surface: 784 cm²/ml Hydraulic section: 358.9 cm² Opening dimensions: 18 / 195 mm


Weight: 25,9 KG



■ IMPLEMENTATION:

X = 150 mm; L = 550 mm

Z = 150 mm; Y = 155 mm; y = 85 mm

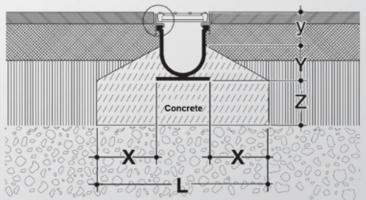

■ QUALITY- ENVIRONMENT:



DATE: December 2013



Head office and Plants: 37, rue Pierre et Marie Curie - BP 10966 - 49309 CHOLET Cedex

Email: export.nicoll@aliaxis.com

NON CONTRACTUAL DOCUMENT

- an **OAliaxis** company