




Kenadrain | Channel width 300, class C250

Code: DR302CF



EN1433
CE

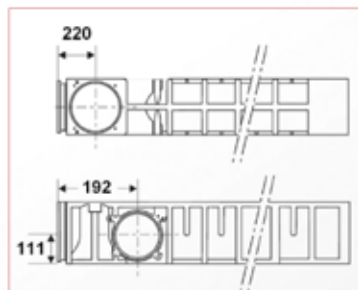

■ FUNCTION:

This product is to drain run-off water with gratings of length 1000 mm, of class C250 complying with the standard NF-EN 1433, holding the CE marking, assembled via a male/female connection system with locking

■ DESCRIPTION:

It is comprised of:

- a injected recycled polypropylene black body
- two galvanized steel edges.
- two black cast iron gratings class C250
- 4 locking system with bolts per grating

■ ACCESSORIES:

To connect the channels to the underground network:

- PVC end caps and verticals outlets (Ø200, Ø250 ou Ø315)
- EKS0 sump units manufactured also in PVC




■ CHARACTERISTICS:

Resistance class: C250
Effective width: 304 mm
Effective depth: 320 mm
Grating type: Cast iron
Drainage surface: 1202 cm²/ml
Hydraulic section: 874,3 cm²
Opening dimensions: 18 / 300 mm
Weight: 46,6 KG

■ IMPLEMENTATION:

X = 150 mm; L = 660 mm
Z = 150 mm; Y = 290 mm ; y = 85 mm

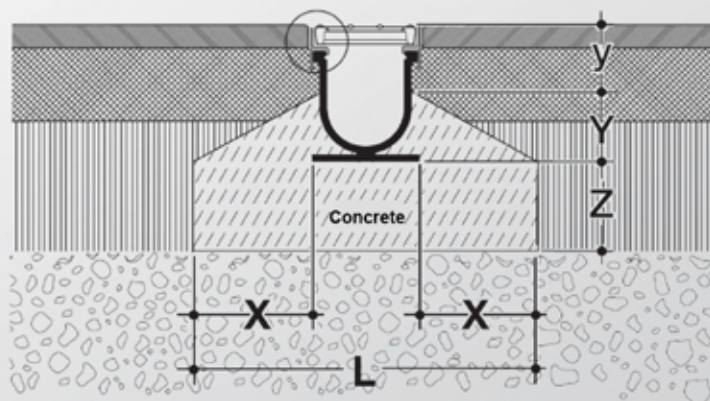

■ QUALITY- ENVIRONMENT:

ISO 9001
ISO 14001
ISO 50001
BUREAU VERITAS
Certification



DATE: December 2013