
Wicoll DATA SHEET


Kenadrain I Channel width 300, class E600

Code: DR302EF









■ FUNCTION:

This product is to drain run-off water with gratings of length 1000 mm, of class E600 complying with the standard NF-EN 1433, holding the CE marking, assembled via a male/female connection system with locking

■ DESCRIPTION:

It is comprised of:

- a injected recycled polypropylene black body
- two galvanized steel edges.
- two black cast iron gratings class E600
- locking system with 4 bolts per grating



To connect the channels to the underground network:

- PVC end caps and verticals outlets (Ø200, Ø250 ou Ø315)
- EKSO sump units manufactured also in PVC

■ CHARACTERISTICS:

Resistance class: E600 Effective width: 304mm Effective depth: 320mm Grating type: Cast iron

Drainage surface: 1258 cm²/ml Hydraulic section: 874.3 cm² Opening dimensions: 19,5 / 306 mm

Weight: 56,9 KG

■ IMPLEMENTATION:

X = 200 mm; L = 760 mm Z = 200 mm; Y = 375 mm


■ QUALITY - ENVIRONMENT:










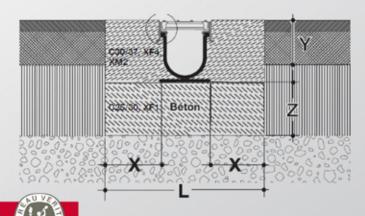





Head office and Plants: 37, rue Pierre et Marie Curie - BP 10966 - 49309 CHOLET Cedex

Email: export.nicoll@aliaxis.com

NON CONTRACTUAL DOCUMENT

an OAliaxis company