


JAEGER (BLUE) 28288

יריעת איטום לקיר / רצפה בפינת מקלחון
להדבקה על הקיר / רצפה בעזרת חומר איטום משחתי
או דבק אריחים צמנטי ועליו להדביק אריחים עם דבק
אריחים צמנטי

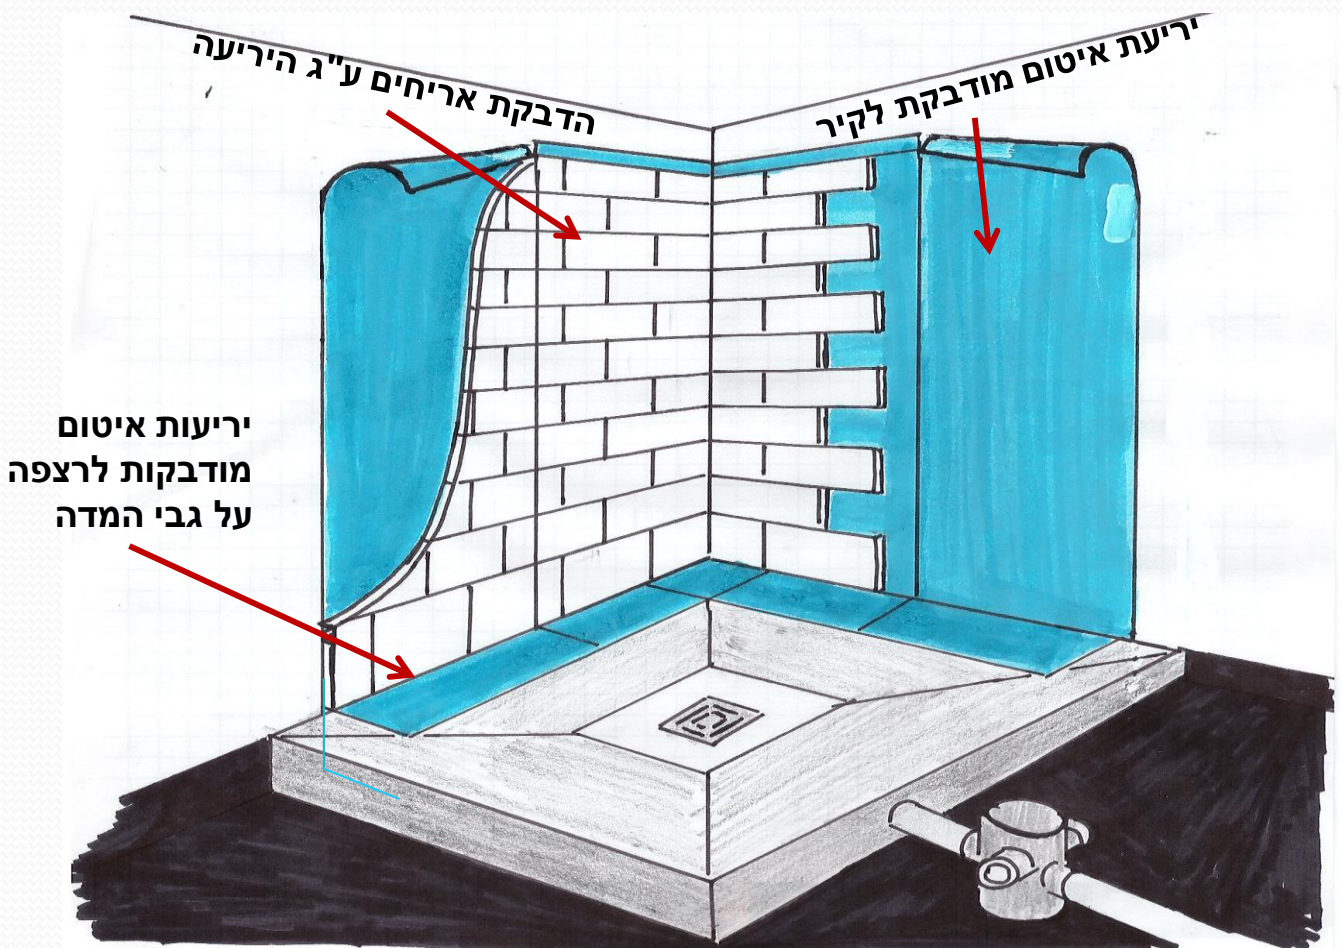

מפרט טכני לגליל יריעת איטום

JAEGER BLUE

(עבור חדרים רטובים מתחת לריצוף / חיפוי אריחים)

Product Information

**Waterproofing membrane
Article No. 28288**



Description:	3-ply waterproof membrane protects floors and walls under thin-set tile installations from substrate cracks and moisture migration.
Material composition:	Substrate: Two outer layers of polypropylene non-woven Membrane: One inner layer of polyethylene waterproofing membrane
Application:	Sealing membrane to be applied with tiles and natural stones for perfect waterproofing. Suitable for medium loads of non-pressurized water indoors (e.g. domestic bathrooms).
Colour:	blue (Other colours in accordance to RAL upon request)
Total width:	1000 mm (Additional widths upon request)
Total thickness (approx):	0,4 mm
Material weight (approx.):	178 g / m ²
Resistance to temperature: min. / max.	- 30°C / + 90°C
Length per roll:	30 metres (Alternative make ups upon request)

Physical Properties: (approx.)	DIN	Value
Burst pressure: max.	Internal	2,5 bar
Breaking load longitudinal	DIN EN ISO 527-3	84 N / 15 mm
Breaking load lateral	DIN EN ISO 527-3	30 N / 15 mm
Extension break longitudinal	DIN EN ISO 527-3	90 %
Extension break lateral	DIN EN ISO 527-3	97 %
Power absorption at 25% Elasticity lateral	DIN EN ISO 527-3	1,5 N / mm
Power absorption at 50% Elasticity lateral	DIN EN ISO 527-3	1,8 N / mm
Resistance to water pressure	DIN EN 1928 (Version B)	> 1,5 bar
UV-Resistance: min.	DIN EN ISO 4892-2	500 h
Bonding strength	DIN EN 1348	> 0,2 N / mm ²

Chemical Properties:		
	Resistance after storage over 7 days by room temperature in following chemicals	+ = resistant 0 = weakened - = non resistant
Hydrochloric acid 3%	Internal	+
Sulphuric acid 35%	Internal	+
Citric acid 100g/l	Internal	+
Lactic acid 5%	Internal	+
Potassium hydroxide 3% / 20%	Internal	+ / +
Sodium hypochlorite 0,3g/l	Internal	+
Salt water (20g/l Sea water salt)	Internal	+

Certified according to DIN EN ISO 9001: 2008

Made in Europe

Warranty: 5 years warranty for the guaranteed product qualities

Attention: Due to technical reasons the colour of the material or the printing may vary slightly from batch to batch.

Storage: cool and dry, protect against sunlight, use within 24 months after receipt.

The above technical data represent average values. The technical information and application instructions are based on our experience and present knowledge. However, it is each users own responsibility to make trials with the original substrates in order to verify the suitability of our products for the intended purpose, taking into consideration all application related parameters. Please contact us if you have any further questions.