
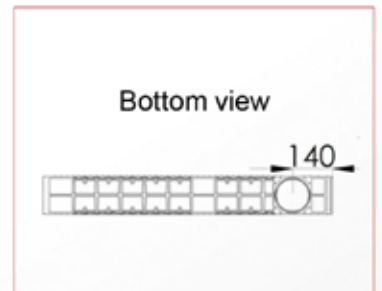
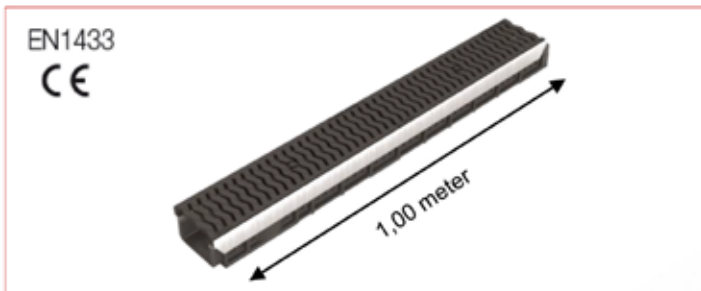



Kenadrain I Park channel 100mm wide with heel ductile iron gratings class C250

Code: DR100CH



FUNCTION:

The drainage channel is designed to drain run-off water. In accordance with EN1433 standard and the CE marking, it can be used in public area in class C250.

DESCRIPTION:

It consists of:

- an injected recycled polypropylene black body
- two galvanized steel edges
- two black heel ductile iron gratings class C250
- 1 screw per grating on galvanized locking bar

Option: other colours are also available on request:

- red Laterite, yellow Pyrite, blue Basalt, grey Lunare and green Malachite



ACCESSORIES:

To connect the channels to the underground network:

- end cap/end outlet Ø50 – NJDR100
- vertical outlet Ø100, 110 or 125 – STDR10, SVDR10 or SXDR10
- sump unit with outlet Ø110 or 125 – PS100V or PS100X




CARACTERISTICS:

Resistance class: C250
 Effective width: 98 mm
 Effective depth: 51 mm
 Grating type: Heel ductile iron
 Drainage surface: 300 cm²/ml
 Hydraulic section: 47.5 cm²
 Opening dimensions: 6 / 104 mm
 Weight: 11.2 Kg

IMPLEMENTATION:

X = 150 mm; L = 430 mm
 Z = 150 mm; y = 85 mm

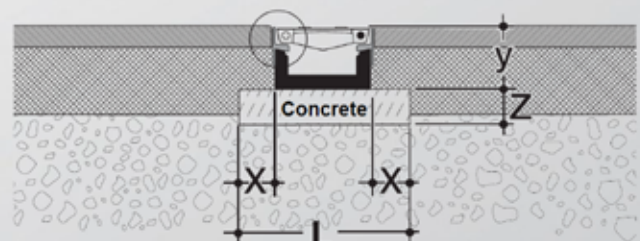

QUALITY - ENVIRONMENT:



DATE: August 2014