
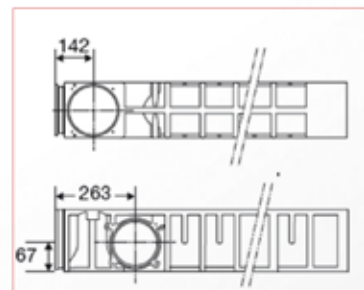
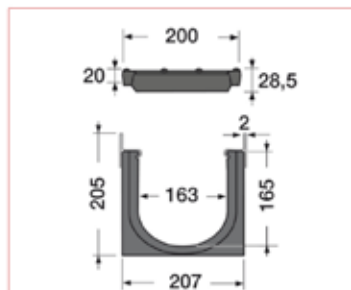


# Kenadrain | Channel width 150, class C250

Code: DR152CF



## ■ FUNCTION:

This product is to drain run-off water with gratings of length 1000 mm, of class C250 complying with the standard NF-EN 1433, holding the CE marking, assembled via a male/female connection system with locking

## ■ DESCRIPTION:

It is comprised of:

- a injected recycled polypropylene black body
- two galvanized steel edges.
- two black cast iron gratings class C250
- 4 locking system with bolts per grating



## ■ ACCESSORIES:

To connect the channels to the underground network:

- PVC end caps, vertical or lateral outlets (Ø125 or Ø160)
- EKSO sump units manufactured also in PVC




## ■ CHARACTERISTICS:

Resistance class: C250  
 Effective width: 163 mm  
 Effective depth: 165 mm  
 Grating type: Cast iron  
 Drainage surface: 624 cm<sup>2</sup>/ml  
 Hydraulic section: 240.8 cm<sup>2</sup>  
 Opening dimensions: 18 / 158 mm  
 Weight: 19,8 KG

## ■ IMPLEMENTATION:

X = 150 mm; L = 510 mm  
 Z = 150 mm; Y = 125 mm ; y = 85 mm

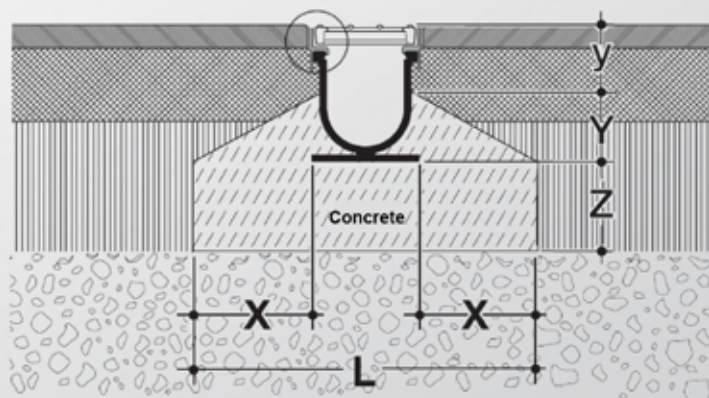

## ■ QUALITY- ENVIRONMENT:

ISO 9001  
 ISO 14001  
 ISO 50001  
 BUREAU VERITAS  
 Certification



DATE: December 2013