


DallFlex 2.0 drain body, DN 50

Part number: 570000
GTIN: 4001636570000
Rebate group: 11

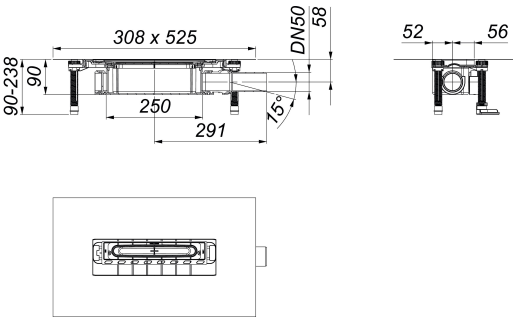

Description:

DallFlex 2.0 drain body, DN 50
Drain body conforming to DIN EN 1253, build-in height 90 mm, for installation with shower channels CeraWall, CeraFloor, CeraFrame Individual, Zentrix, CeraNiveau and CeraFrame Liquid Neo. Side outlet DN 50, can be positioned on three sides without tools, with ball-joint, adjustable 0 – 15 Degrees.

SPECIFICATION

- pre-assembled mounting unit with integrated positioning aid for fit flush adjustment of the shower channels
- integrated anchors for extra grip in the screed
- separately packaged, flexible, click-on sealing sleeve for secure bonding of under-tile waterproofing (conforming to DIN 18534)
- accessories for sound insulated installation
- sound-insulated, height-adjustable mounting feet, with quick-release system for fixing the installation position and height adjustment 90 – 238 mm
- fully removable, two-piece odor trap and rodding eye, 50 mm water seal (conforming to DIN EN 1253)
- hair sieve (can be used optionally)
- temporary blanking plate

MATERIAL

Drain body and outlet polypropylene, highly impact-resistant

Can be connected to British standard pipework with adaptor part No. 880727.

Flow rates tested to DIN EN 1253:

Nominal diameter	Product standard	Min. flow rate according to norm	Water level according to norm	Flow rate at water level 10 mm	Flow rate at water level 20 mm	Drainage capacity
DN 50	DIN EN 1253	0.80 l/s	20.00 mm	0.61 l/s	0.83 l/s	0.83 l/s